









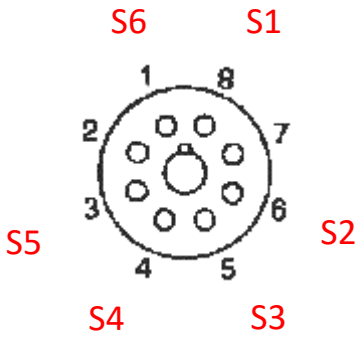
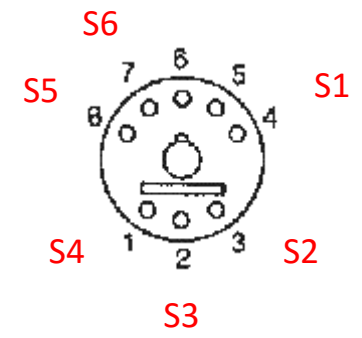

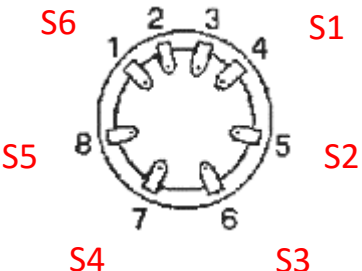


MARER Télémètre Lampemètre L39 tube sockets/switches as seen on panel

<p>1 B3, B4, B5, B6</p> <p>TC:S7</p>	<p>S3</p> <p>S4 S2</p>  <p>S1</p>	<p>2 B5G, E34</p>	<p>S3</p> <p>S2</p>  <p>S1</p>
<p>3 B7B</p>	<p>S3 S2</p>  <p>S4 S5</p> <p>S1</p>	<p>4 B, C</p> <p>TC: S7</p>	<p>S3</p> <p>S2 S4</p>  <p>S1 S5</p>
<p>5 UX4</p> <p>TC: S7</p>	<p>S1 S2</p> 	<p>6 UY5</p> <p>TC: S7</p>	<p>S2</p> <p>S1 S3</p> 
<p>7 UX6</p> <p>TC: S7</p>	<p>S2 S3</p>  <p>S1 S4</p>	<p>8/9 UX7, U7B</p> <p>TC: S7</p>	<p>S3</p> <p>S2 S4</p>  <p>S1 S5</p>
<p>B7</p> <p>TC: S7</p>	<p>S3</p> <p>S2 S4</p>  <p>S1 S5</p>	<p>B8G Loctal</p> <p>Pivot, TC:S7</p>	<p>S6 S1</p> <p>S5 S2</p>  <p>S4 S3</p>

K8A Octal TC: S7		G8A, Y8A TC: S7	
P5, Ct5 TC: S7		P8, Ct8 TC: S7	

Quick reference switches → tube pins								
Switches →	1	2	3	4	5	6	7	8
Tubes / pins ↓								
1 B3/B4/B5/B6	4	5	1	6	-	-	top	-
2 B5G, E34	4	5	1	-	-	-	top	-
3 B7B	4	7	1	3	2	-	top	-
4 B/C	4	5	6	7	1	-	top	-
5 UX4	3	2	-	-	-	-	top	-
6 UY5	4	3	2	-	-	-	top	-
7 UX6	5	4	3	2	-	-	top	-
8 UX7	6	5	4	3	2	-	top	-
9 U7B	6	5	4	3	2	-	top	-
B7	3	2	1	7	6	-	top	-
B8G Loctal	7	6	5	4	3	2	top/pivot	-
K8A Octal	8	6	5	4	3	1	top	-
G8A, Y8A	4	3	2	1	8	7	top	-
P5, Ct5	4	5	1	-	-	-	top	-
P8, Ct8	4	5	6	7	8	1	top	-